


EXPERT 04.6-NN


Hot gas unit from rework station series 04.6. The perfect system unit for professional desoldering of electronic components and removal of residual solder from PCB. The station is a stand alone unit and does not need computer aside - profiles of applications can be saved in the control unit.

This unit easily can be completed by under heater IRH and vacuum module to become a full rework station.

Standard Equipment (Art.No. HA00.4075)

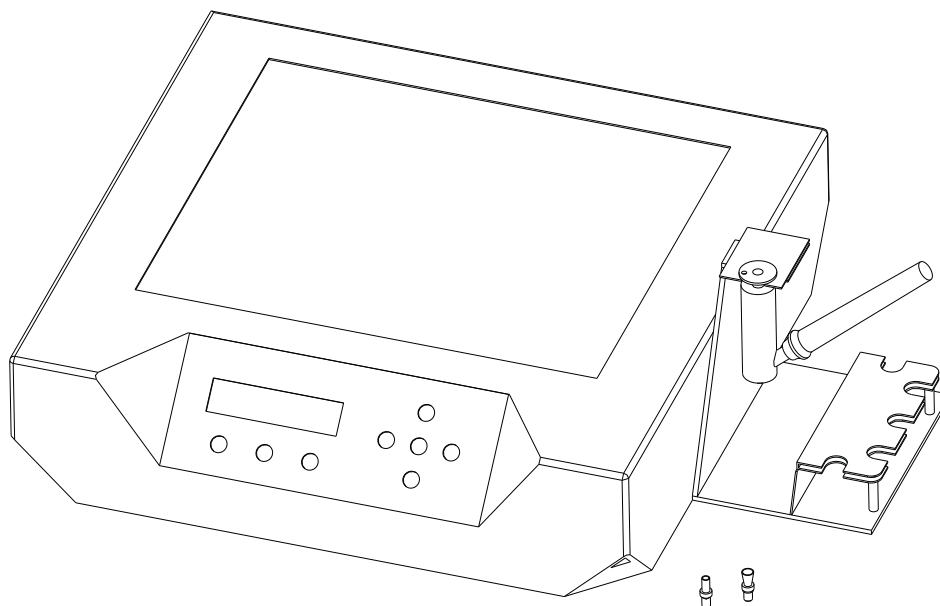













- Control unit Hot Air 05
- Soldering pen
- Nozzles 7mm, 4mm
- Auto start magazine
- Manual

Technical Data:

System power consumption:	500 VA
Power soldering pen:	300 W, 35 l/min
Mains:	1 Phase, 230VAC, fused 16A
Pressurized air:	5-8 bar, 100 l/min filtered, dry air
Footprint:	380 x 320 mm ²

EXPERT 04.6-NN

Optional Extras

SB04.1002	IRH radiation element - 110 Watt 65*80 mm for DBL/HA 05/06	 SB04.1002
HA00.4018	Vac module for Hot Air 04/05 NN pen, stand, basic equipment vac/dis	 HA00.0048
HA00.4015	Vac module (high condensed) for Hot Air 04/05	
HJ00.1011	Vacuum connection at solder pen for HA 05NN, soldering tools with vacuum	 HJ00.1011
HJ01.0004	Vacuum switch for HA05NN solder vacuum <=> vacuum pen	 HJ01.0004
HF00.0004	Handy Fix 03.1 PCB support 280*380mm, 4 magnet ho. 40.5	 HF00.0004
HF00.0005	Support for hand for Handy Fix	 HF00.0005
SF03.0019	PCB clamping holder 40.5 with 3 fingers for mobil phone pcbs on HB05/IR/IRD/IRH/IRF	 SF03.0019
HF00.0100	Solder arm CSP/BGA for HJ 05/HA 05NN for Handy Fix 03	 HF00.0100
LW40.1097	Soldering nozzle set CSP/QFN (lead free)* for all CSP types, 4 pieces (9, 11, 13, 16)	 LW40.1097 (length + 1.4 mm)
LW01.0199	Soldering tool set with vacuum QFP 4 for HA 05 NN, 4 pieces (15, 20, 25, 36)	 LW01.0199
LW40.1103	Solder nozzle set BGA 4 4 pieces (15, 27, 35, 40)	 LW40.1103
DB15.0010	SMD placement nozzle, 0,5 mm for 0402 etc	 DB15.0010 0.50
HA00.4025	Nitrogen input for Hot Air 04/05 reduces consumption of N2 for vacuum	 HA00.4025 N ₂
HASX.0006	Easy solder 05 eco Licence ES, CD, cable, manual	 HASX.0006